

ATEM 1 M/E Advanced Panel 30



The ATEM 1 M/E Advanced Panel 30 features a single M/E row, 30 input button design that is ideal for switching big productions from desk surfaces that are not deep enough for a bigger panel. It has 3 independent system control LCDs plus it can control up to 4 M/Es in larger switchers. All input buttons include LCDs for custom labeling and it also includes an independent select bus! Dual power inputs provide redundancy and the built-in 4 port Ethernet switch means no additional network equipment is needed so it will fit even the most challenging live production spaces!

\$6,689


Connections

Ethernet

4 x 10/100/1000 BASE-T with loop output for additional control panels or computers.

Software Updates

1 x USB-C for firmware updates.

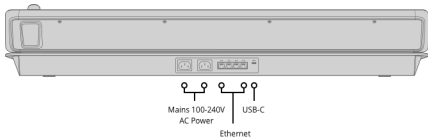

Product Specifics

Number of Mix Effects Rows

1

Preview Transition

1

Dedicated Macro Buttons

1 x 30

Direct Cross Points

30

Transition Rate Displays

Via main menu

Transport Control Buttons

8

Shifted Cross Points

60

LCD Menu Displays

3

Destination Bus

1

Crosspoint Button Type

Tri-Color LED

Menu Control

3 x 20 buttons

Source Select Bus

1

Fader Bar	3 Axis Joystick	Numeric Keypad
1	1	1

Software

Software Applications
ATEM Software Control Panel.

Operating Systems



Mac 14.0 Sonoma,
Mac 15.0 Sequoia or later.



Windows 10 and 11.

Power Requirements

Input Voltage	Redundant Power	Power Usage
2 x Internal 100 - 240V AC.	Yes	80W

Physical Specifications



Environmental Specifications

Operating Temperature	Storage Temperature	Relative Humidity
0° to 40° C (32° to 104° F)	-20° to 60° C (-4° to 140° F)	0% to 95% non-condensing

What's Included

ATEM 1 M/E Advanced Panel 30

Welcome wallet with QR code for software download

Warranty

1 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2025, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller